



### ROBUST ACCELEROMETER (4-20 mA)

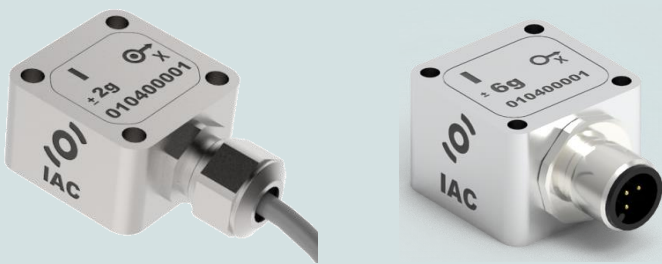


#### PROPERTIES

- 1 Axis
- Suited for direct connection to standard control and measurement equipment, e.g. PLCs or panel meters
- Embedded 4..20mA signal conditioning
- Galvanically Isolated
- Protected against false polarization
- Compact and rugged design
- Protection grade IP67


#### BLOCK DIAGRAM

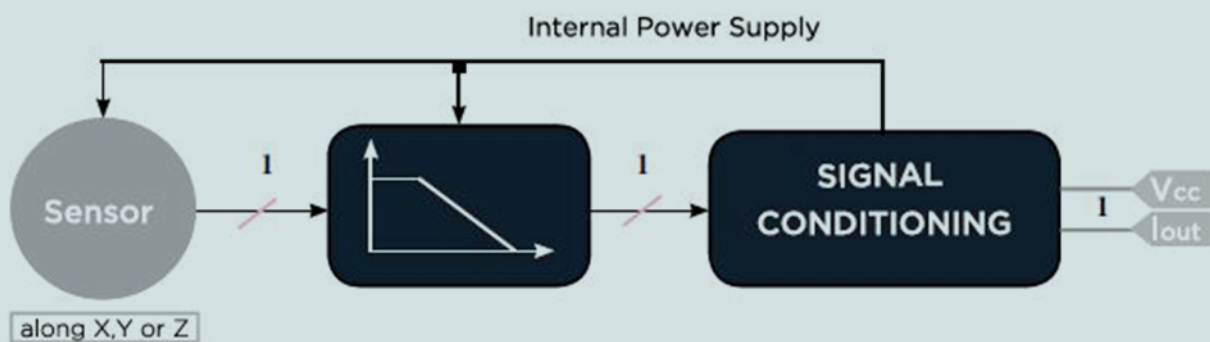

## DIMENSIONS - Cable Gland Model

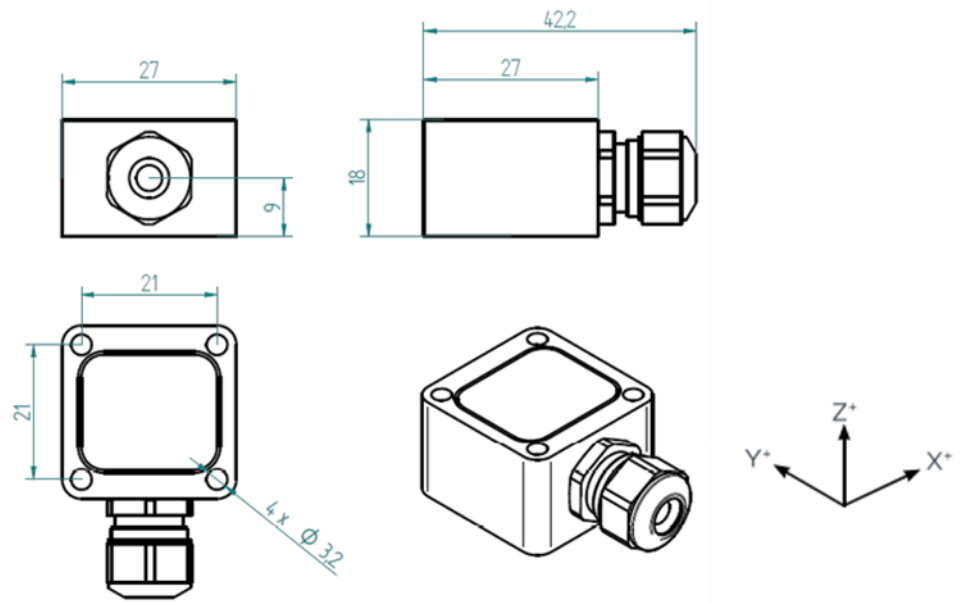

## DIMENSIONS - M12 Connector Model

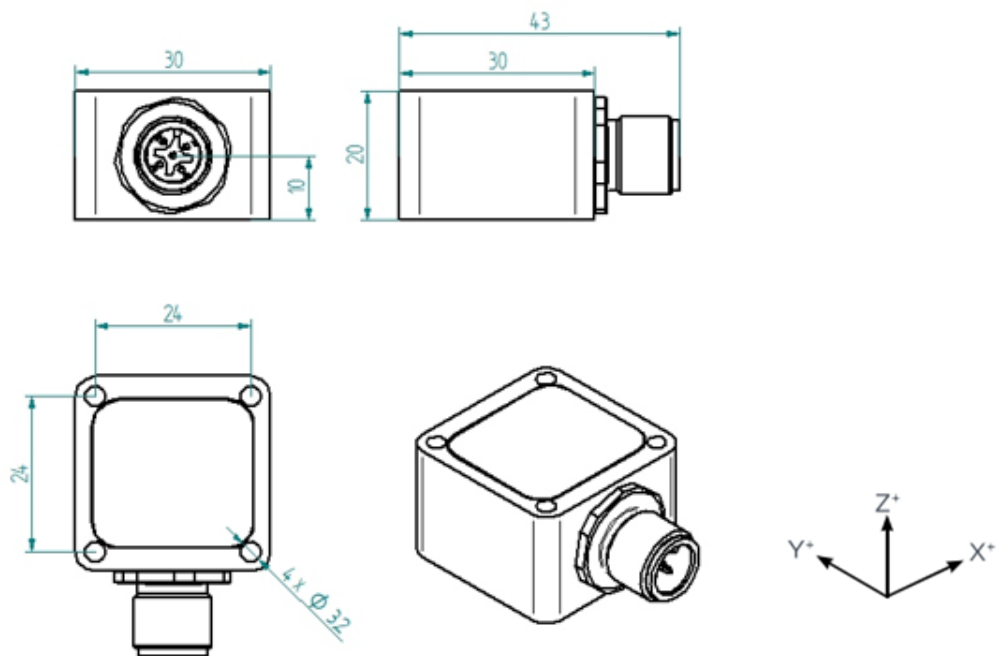

## MOUNTING ACCESSORIES

See " IAC - Accelerometer Accessories data sheet "

## SPECIFICATIONS - All Models

<b>OUTPUT/CHANNEL</b>	Output Range	
	Supply Voltage	
	Measuring Range	
	Sensitivity	
	Lower frequency limit	
	Upper 3 dB frequency limit	
	Non-linearity	
	Residual noise	
	Transverse Sensitivity	
	Destruction limit	
<b>ENVIRONMENTAL CHARACTERISTICS</b>	Temperature Range	
	Temperature coefficient of sensitivity	
	Temperature drift of zero point	
	Protection grade	
<b>MECHANICAL DATA</b>	Weight Without Cable (g)	
	Case Material	
	Mounting	


<sup>(1)</sup> Stainless Steel Casing AISI316 Grade (e.g. for offshore/marine environment)

<sup>(2)</sup> Aluminum (MIL-A-8625 Type II coating)


## ELECTRICAL CONNECTIONS - Cable Gland Model

Signal X sensing	Signal Y sensing	Signal Z sensing	3 x 0,25 <sup>2</sup>
Sensor supply + input	Sensor supply + input	Sensor supply + input	Brown
Sensor supply - input	Sensor supply - input	Sensor supply - input	White
X Axis Out			Green
	Y Axis Out		Green
		Z Axis Out	Green

## ELECTRICAL CONNECTIONS - M12 Connector Model

<b>I 01</b>		1	OUT	4-20mA current output
		2	NC	-
		3	NC	-
		4	+24VDC	Sensor supply + input
		5	0VDC	Sensor supply - input

# ELECTRICAL CONNECTIONS

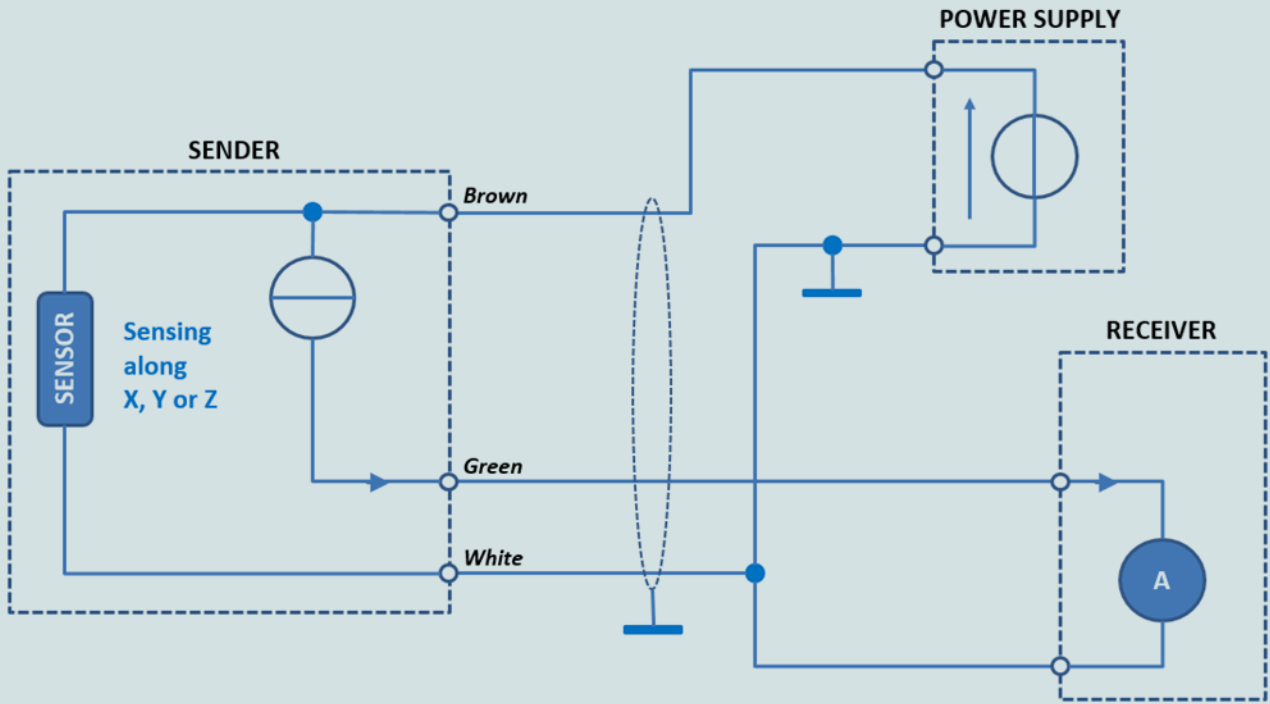

# ORDERING INFORMATION

IAC	I	01	A	XX	XX	Xg	XXXXHz	X	XX.X m	
Sensing Axis		Cable Connection		Casing		Range	Low Pass Filter Frequencies		Low Pass Filter Orders	Cable Length
X	CG	Cable Gland	AL	Aluminium	± 2g	0100	100Hz	1	1st order	Value in meter
Y	CO	M12	SS	Stainless Steel	± 6g	0250	250Hz	2	2nd order	
Z						0500	500Hz			
							1000	1000Hz		